



Suitable Applications:



OPEN OFFICES



RESTAURANTS



ATRIUMS



SCHOOLS & COLLEGES



RECEPTION AREAS



CONFERENCE CENTRES



CORRIDORS



GYMS



PUBS & BARS



SHOWROOMS

Please note, MuffleArt are not designed to be used in swimming pools or outdoors environments.

Bringing you MuffleArt with Ecophon! Working alongside industry leader Ecophon, we are proud to bring you a wall art panel like no other. Using Ecophon Focus™ Levels and Ecophon Solo™ panels, we are able to provide a Class A-B acoustic solution combined with a unique artistic approach. Choose from a wide range of themes, designs and sizes to create the perfect wall feature.

Advantages:

- High level of sound absorption (Class B/A)
- Available in a wide range of designs
- Outstanding print quality (front face)
- Available in a range of sizes and configurations
- White edge detail for a contemporary look



Installation for 1200x1200, 1200x1800 and 1200x2400 Panels (Dimensions mm)



1x Trim

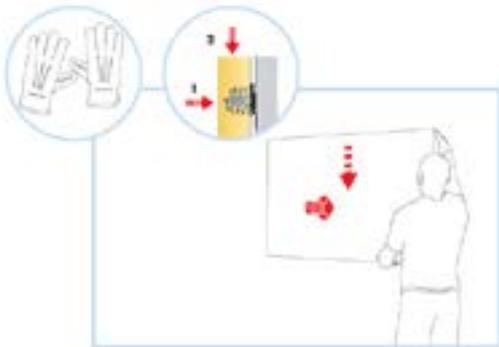

 2x Absorber
Anchor


2x Distance Pins

Please note the trim comes in one piece and can be cut in two. This comes in a box with one trim and two wall distance pins and two absorber anchors

The trim is screwed into the wall, the Absorber Anchor is screwed into the back of the panel and the distance pins to be located towards the bottom of the panel (20mm from the edge).

Line up the anchors to the trim and slot into place.



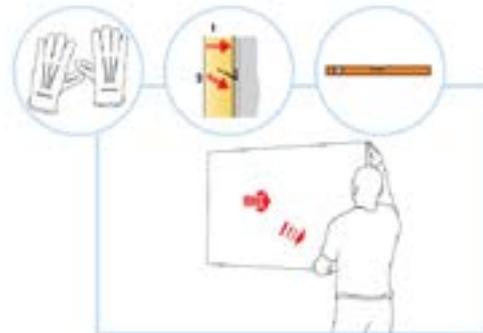
Installation for 600x600, 1200x300 and 1200x600 Panels (Dimensions mm)



1x Hook

Screw hooks to the wall, and align with a spirit level, push the panel onto hooks and pull down slightly. (Excessive force not needed).

Ensure hands are clean or use gloves to protect your panel.



Cleaning

Light dirt marks may be removed by using a proprietary carpet spot cleaner. A small area should be tested before doing the rest of the area to ensure that the fabric is not adversely affected.



Density

Our MuffleArt panels weigh in at 3.5kg/m² for the 25mm thickness panels. 40mm thickness panels weigh 4.5kg/m². Note: All weights are given as approximations.



Fire

MuffleArt core board has been tested and offers Class O fire rating to BS476: Part 6. Fabric facing complies with Class 1 to BS476: Part 7. Class O fabrics can be supplied on request.

Product Specification

Delivery, Storage & Handling

Protect your MuffleArt from excessive moisture when storing and handling.

Supplier

-  www.muffle.co.uk
-  info@muffle.co.uk
-  01924 938911