

INSTALLATION INSTRUCTIONS BAUX ACOUSTIC PULP

BAUX

**IS FOUNDED ON THE BELIEF
THAT BUILDING MATERIALS SHOULD BE
SUSTAINABLE, SURPRISINGLY FUNCTIONAL AND
REMARKABLY BEAUTIFUL**

LET'S BUILD

DO NOT INSTALL MATERIALS OF UNACCEPTABLE QUALITY

Be sure to inspect materials carefully upon delivery and note any damages or quality rejections to BAUX immediately. BAUX do not bear any responsibility to adjust already installed products that don't meet expected quality standards.

These instructions serve as a guide. The responsibility for recognizing and compensating for field conditions is with the installer. Installer should follow best practices for construction and workmanship. BAUX bears no responsibility for installation safety, direct or indirect damages or contractor selection.

BAUX ACOUSTIC PULP

BAUX Acoustic Pulp is a green hi-tech bio-composite, 100 % biodegradable and renewable, a result from 25 years of academic research and knowhow within biomimicry - an approach that seeks sustainable solutions from the idea that nature already have the solutions itself.

In the BAUX Acoustic Pulp product, all harmful chemicals have been replaced with nature's own magic. It is harmless for us, it is harmless for the environment. An advanced and patented technology to modify cellulosic fibres have been used that drastically move the boundaries for cellulosic materials properties to a completely new level.

READ THIS FIRST! PREPARATIONS REQUIRED BEFORE INSTALLATION

Unpacking and Handling

- Please handle BAUX products with care during unpacking and installation. Make sure to clean hands or use clean gloves before touching the panels to minimize risk for soiling the surface.
- Materials waiting to be installed should be stored in original packing in a clean, indoor and climate controlled environment free of moisture.

General

- BAUX Acoustic Pulp can be installed using Glue. Using glue is a fast, efficient and proven installation method. Our Pattex No More Nails glue has been selected due to its environmental conditions with 0,00% VOC (alternative installation methods are under development).
- BAUX Acoustic Pulp panels are not developed to be attached to ceilings.
- The responsibility for evaluating and recognizing potential issues and compensating for different field conditions is with the installer.
- BAUX Products can be cut to shape with a fine hand saw, circular saw or equal. Keep in mind that the panels are hollow and that the cut panels will need most of the edges intact to keep its stability. Cut edges should be covered with a wooden spline or similar.

Wall Conditions


- If the wall area where you intend to install BAUX Acoustic Pulp is uneven, it must be leveled out before installation.
- Make sure that the wall area is clean and free from dust. Walls affected by nicotine from cigarettes have to be carefully cleaned or repainted before installation.
- Pay attention to painted surfaces where there is a risk for the paint to come off. Never install on a recently painted surface, the paint needs to dry properly.
- Mounting BAUX Acoustic Pulp at walls towards outside is not recommended if wet or cold.

Introduction

1. Before you start, read and follow the preparations required before installation.
2. Make sure to use one of the glue types recommended by BAUX, see below.
3. Position and mark the location on the wall where you intend to mount your BAUX Acoustic Pulp Panels carefully, for best result a laser level pass is recommended.

Glue installation instruction

1. Glue should be applied on the rear side of the panels.
2. The glue string should be at least 8 mm in diameter ~0.3 inches.
3. Apply glue according to the dotted lines in illustration. One turn along the edge of the panel and one turn along the edge of the flat area in the middle of the panel.
4. Push the panel firmly towards the wall surface. It will be possible to move the panel slightly on the surface to secure an exact positioning before the glue hardens.
5. Make sure the first row is perfectly aligned. A smaller error in the beginning will grow successively further along the wall.

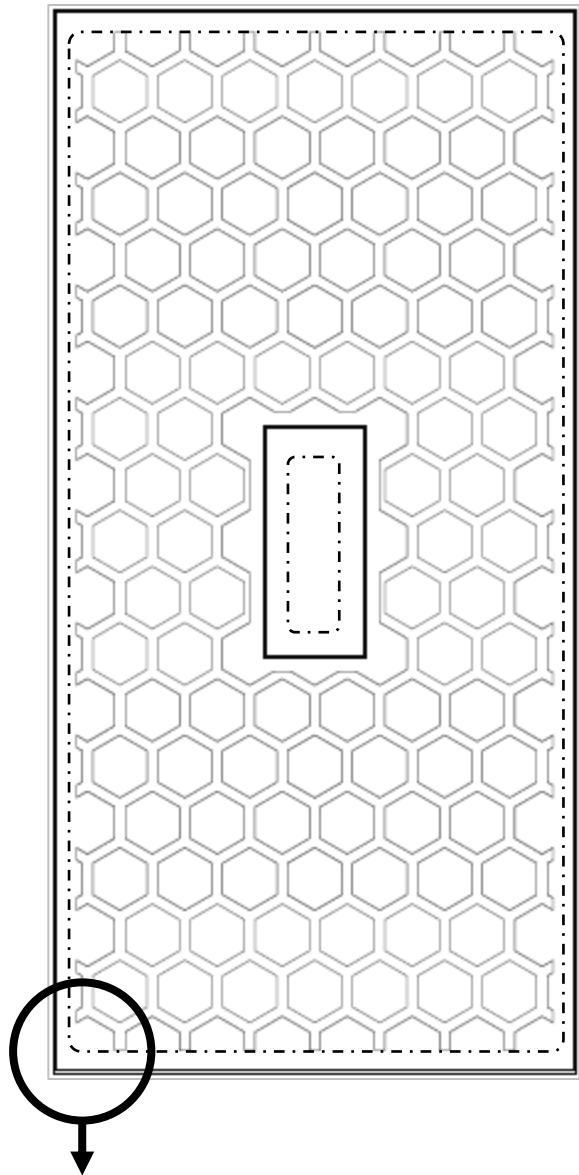

Use either of these (or similar)

PREFERRED


Pattex No More Nails
Henkel Corporation
VOC: 0,00 %/weight

ALTERNATIVE

Loctite P. Fast Grab
Henkel Corporation
Art. 1417170 or 1655973
VOC: <1,7%/weight

ALTERNATIVE

Casco Superfix
Sika Sweden AB
Art. 3890 or 3891
VOC: 0.01 %/weight

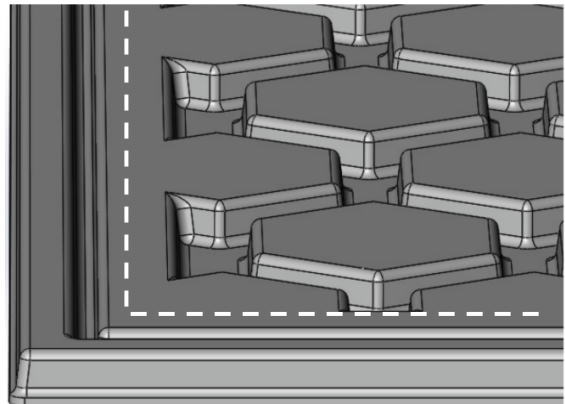

GET IN TOUCH

info@baux.se
www.baux.se

BAUX